

ZINC DUROLITE SERIES PLATE CASTORS

UP TO 125KG / CASTOR



S3102















S4110B




S5104

SPECIFICATIONS & FITTINGS


 Diameter (mm)	 Width (mm)	 Wheel Type	 Wheel Code	 Bearing Type	 Load Capacity	 Height (mm)	 Swivel Radius	 With Brake	 Rigid Code	 Swivel Code
75	32	Inst Rubber	IR3008	Ball	80/45	107	71	105	R3105	S3104 #
75	32	Reb Rubber	RR3348	Ball	80/45	107	71	105	R3117	S3116 #
75	32	Poly Nylon	PU3344	Ball	80/45	107	71	105	R3107	S3106 #
75	30	Nylon	NY3321	Plain	80/45	107	71	105	R3103	S3102 #
100	32	Inst Rubber	IR4007	Ball	100/80	135	90	106	R4105	S4104
100	32	Anti Static	AS4005	Ball	100/80	135	90	106	R4121	S4120
100	32	Reb Rubber	RR4473	Ball	100/80	135	90	106	R4111	S4110
100	32	Poly Nylon	PU4444	Ball	100/80	135	90	106	R4107	S4106
100	30	Nylon	NY4417	Plain	100/80	135	90	106	R4103	S4102
100	36	Aluminium	AL472	Oilless bush	125/100	133	90	-	R4113	S4112 *
125	32	Inst Rubber	IR5007	Ball	100/80	161	102	106	R5105	S5104
125	32	Anti Static	AS5005	Ball	100/80	161	102	106	R5121	S5120
125	32	Reb Rubber	RR5573	Ball	100/80	161	102	106	R5111	S5110
125	32	Poly Nylon	PU5555	Ball	100/80	161	102	106	R5107	S5106
125	30	Nylon	NY5517	Plain	100/80	161	102	106	R5103	S5102
150	32	Inst Rubber	IR6009	Ball	100/80	190	125	125	R6105	S6104
150	30	Poly Nylon	PU6660	Ball	100/80	190	125	125	R6107	S6106

To order castor with a Swivel Lock & Brake (B) or Green Directional Lock (D) to the end of the Swivel Code, eg S4110B indicates a brake castor. Castors marked # are not available with Directional Locks. Castors marked * are not available with brakes.
 Indicates castors suitable for high/low temperature applications.

BASEPLATE DIMENSIONS & DRILLING PATTERNS FOR ZINC DUROLITE CASTORS

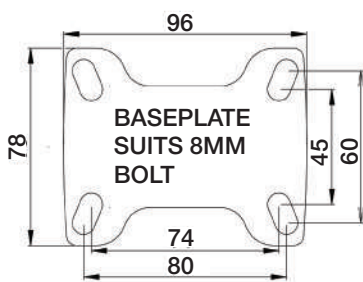

RIGID

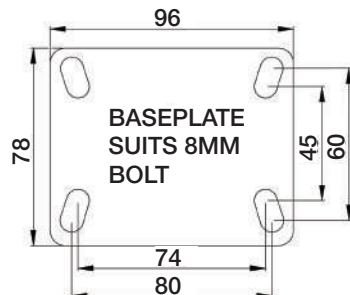

SWIVEL



R4113

MOUNTING PLATES AVAILABLE IF REQUIRED
page 95