


FLOOR LOCKS


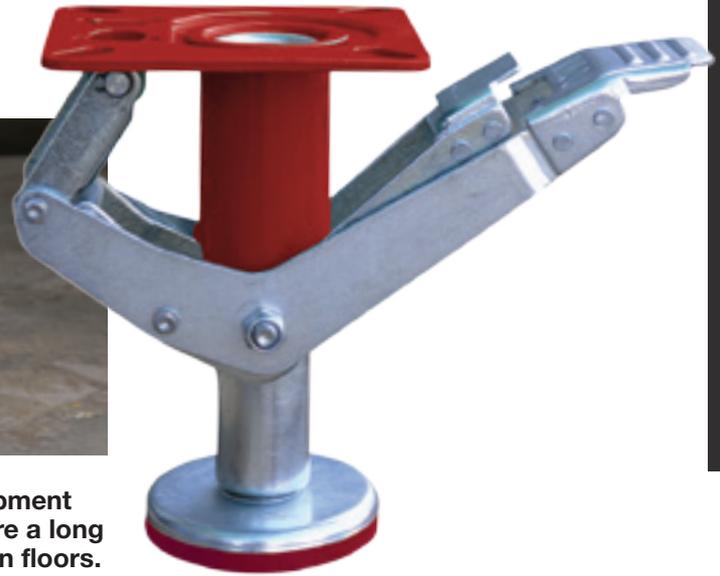


FLOOR LOCKS


Richmond's Floor Locks are designed to stop portable equipment and trolleys from moving. They are foot operated, and feature a long lasting resilient polyurethane pad and swivel base for uneven floors.

Extended Height (mm)	Retracted Height (mm)	Stroke (mm)	Pedal Length (mm)	Load Capacity (kg)	Floor Lock Code
155	130	25	140	200	900-2FL
215	170	45	145	300	900-4FL

CROSS SECTION

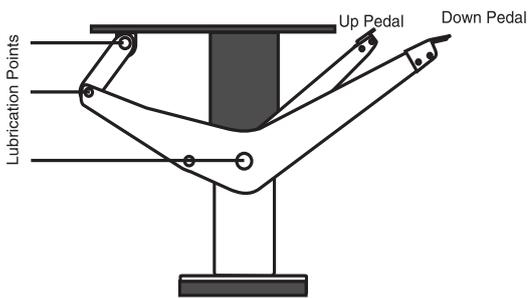

BASEPLATE DIMENSIONS

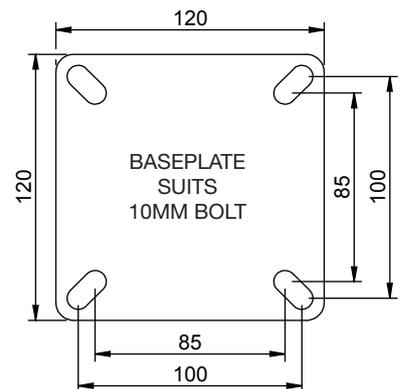

FLOOR LOCK OPERATION

- 1** Depress the down pedal as far as it will go. The lock is now set
- 2** To unlock, press the up pedal until it is level with the down pedal. Release. The base will then retract from the floor

SELECTING & INSTALLING FLOOR LOCKS

- It is important to select a model which clears the floor when retracted.
- To adapt a floor lock to your current equipment, select a model with an extended height 1.6 mm to 6mm greater than the overall height of the castors.
- The lock must be centred between castors
- When installed the floor lock must be set 5mm from ground level when in the UP position