

CONVEYOR FRAMES




CGR104

LENGTH: 1500mm **CROSS MEMBERS:** 3
WIDTH: 290mm

LOAD CAPACITY

Frame laid directly on the ground: 900kg
Frame supported with 2 stands: 400kg

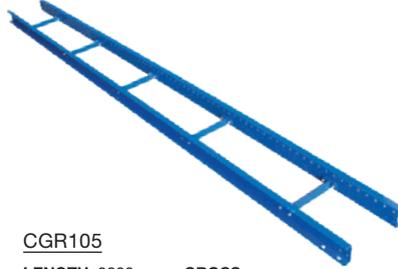

CGR105

LENGTH: 3000mm **CROSS MEMBERS:** 5
WIDTH: 290mm

LOAD CAPACITY

Frame laid directly on the ground: 1800kg
Frame supported with 2 stands: 400kg
Frame supported with 3 stands: 650kg



CGR106

LENGTH: 1500mm **CROSS MEMBERS:** 3
WIDTH: 450mm

LOAD CAPACITY

Frame laid directly on the ground: 900kg
Frame supported with 2 stands: 400kg



CGR108

LENGTH: 3000mm **CROSS MEMBERS:** 5
WIDTH: 450mm

LOAD CAPACITY

Frame laid directly on the ground: 1800kg
Frame supported with 2 stands: 400kg
Frame supported with 3 stands: 650kg



CGR109

LENGTH: 1500mm **CROSS MEMBERS:** 3
WIDTH: 600mm

LOAD CAPACITY

Frame laid directly on the ground: 900kg
Frame supported with 2 stands: 400kg



CGR111

LENGTH: 3000mm **CROSS MEMBERS:** 5
WIDTH: 600mm

LOAD CAPACITY

Frame laid directly on the ground: 1800kg
Frame supported with 2 stands: 400kg
Frame supported with 3 stands: 650kg

CONVEYOR STANDS

Manufactured from a high quality pressed metal with a hard wearing attractive powder coated finish, Richmond's Adjustable Conveyor Stands provide a rigid footing for Gravity Conveyor Systems.

An adjustable height range of 715 to 1015mm provides flexibility in application and operator comfort. Richmond advises that conveyor stands whilst free standing must be securely fixed into position.



CSR003



LEVELLING FEET AVAILABLE TO SUIT

SPECIFICATIONS

Model Number	Elevation Range (mm)	Width (mm)	To Suit Overall Conveyor Width (mm)	Load Capacity (kg)
CSR003	715 - 1015	230	290	300-400
CSR001	715 - 1015	390	450	300-400
CSR002	715 - 1015	540	600	300-400

IMPORTANT!

IT IS RECOMMENDED THAT CONVEYOR STANDS - WHILST FREE STANDING - BE SECURELY FIXED INTO POSITION. IF YOU REQUIRE FREE MOVEMENT OF YOUR RIGID CONVEYOR SYSTEM, SPEAK TO RICHMOND FOR A SOLUTION