


SCAFFOLD CASTORS

These scaffold castors are compatible with Kwik Stage Steel Scaffolding and mobile Aluminium Scaffolding/ Platform products. They are tested and approved to AS1576.2 2009 standards.

They are designed to accommodate a variety of scaffold tubing including mild steel or aluminium with an outer diameter of 48.3mm. Solid round tubing is also suitable with an outer diameter not exceeding 50mm.

The adjustable scaffold castor is designed to accommodate a variety of scaffold tube including mild steel or aluminium with an outer diameter of 48.3mm and internal diameter of 39.46mm.

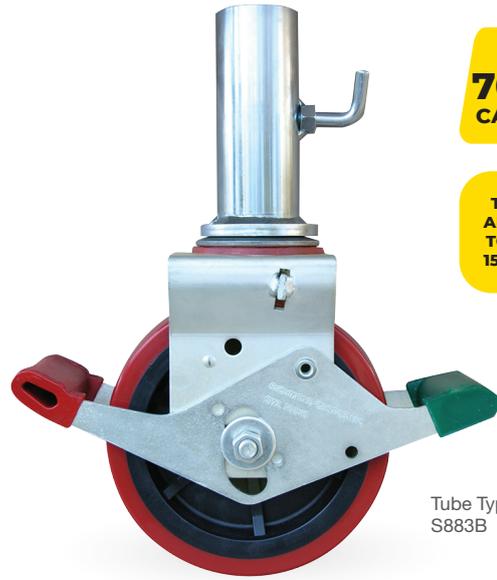

UP TO
700KG
CAPACITY

TESTED &
APPROVED
TO AS/NZS
1576.2:2009

Tube Type
S883B

TUBE TYPE SCAFFOLD CASTOR TO SUIT 48MM OD TUBE

Diameter (mm)	Width (mm)	Wheel Type	Wheel Code	Bearing Type	Load Capacity (kg)	Swivel Code
200	50	Poly Nylon	PU8079	Roller	700	S883B



UP TO
700KG
CAPACITY

TESTED &
APPROVED
TO AS/NZS
1576.2:2009

Adjustable
Thread
S879B

ADJUSTABLE THREAD TYPE SCAFFOLD CASTOR

Diameter (mm)	Width (mm)	Wheel Type	Wheel Code	Bearing Type	Height Adjustment (mm)	Load Capacity (kg)	Swivel Code
200	50	Poly Nylon	PU8079	Roller	310-450	700	S879B

Additional socket and pin sizes are available. Contact us to find out more.