

TOWMASTER SERIES CASTORS

These castors are suitable for towing speeds of up to 24kph, and were initially designed for airport ground support dollies. They are also seen in container handling areas, wharves and manufacturing plants.

- Twin wheel solid pneumatic wheels
- Ideal for tarmac use
- Richmond offers a full maintenance and service program on this castor series



UP TO
2250KG
CAPACITY

**CUSTOM
DESIGN**




S1622

Diameter (mm)	Width (mm)	Wheel Type	Wheel Code	Bearing Type	Load Capacity (kg)	Height (mm)	Swivel Radius (mm)	Rigid Code	Swivel Code
406	125 x 2	TW Solid Pneumatic	SN1619 x 2	Ball	2250	460	322	R1625	S1624
406	125 x 2	TW Solid Pneumatic	SN1615 x 2	Ball	2250	460	322	R1623	S1622

Brake Options


B = Brake D = 4-Way Directional Lock

To order castors with Brake or 4-Way Directional Lock add B or D to end of swivel code e.g. S1622B

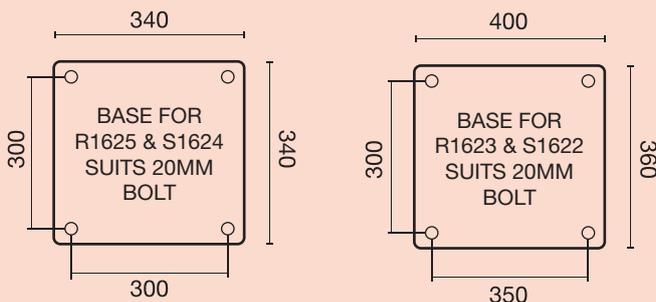

Alternative/replacement
Towmaster castors suitable for fully imported ground support container trailers are available (R1639 & S1638).

These castors fit directly to the trolley and are backed by Richmond's service and spare parts program.



CUSTOM DESIGNED & MANUFACTURED IN MELBOURNE