
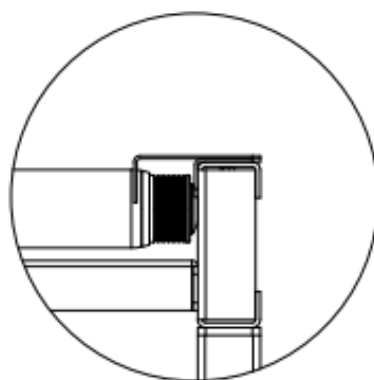
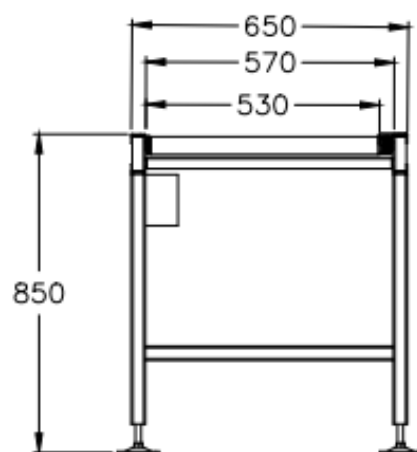
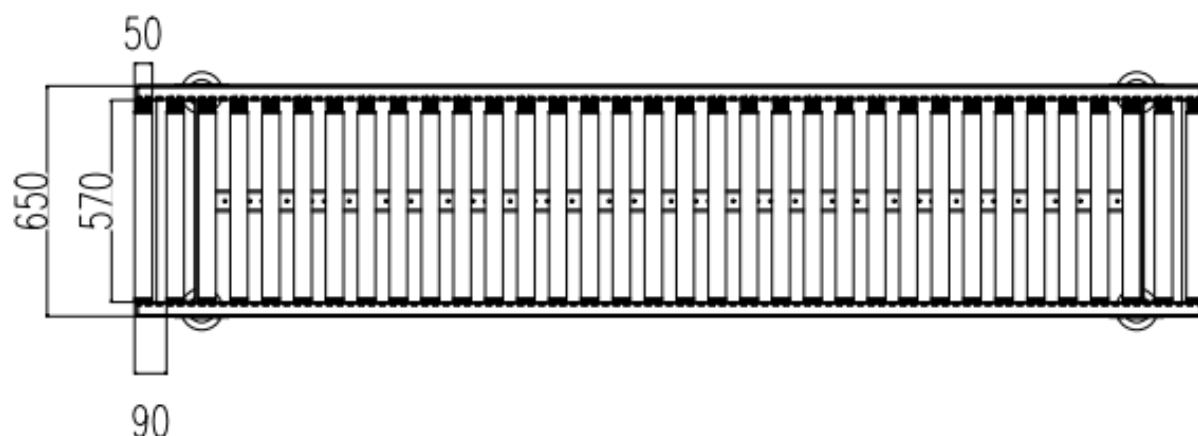


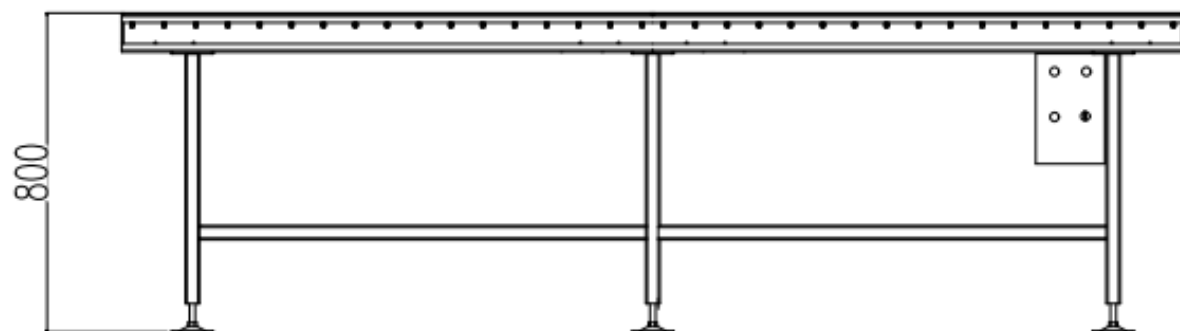

Spec:

- 1.Size: 3000*650mm, Height: 800-900mm
- 2.Frame material: 120*40MM Mild Steel
- 3.Legs material: 40*40mm Mild Steel
- 4.Roller material: SS201Tube+Aluminum /plastic caps
- 5.Roller Pitch: 90mm
- 6.Load capacity: 50KG/m
- 7.Drive way: 3PJ PolyVee belt
- 8.Bearing: C&U Bearings

Parameters:

- 9.Drum motor: Ø50-24V-80W-25m/min-534L
- 3 pcs Drum motor drive 31 pcs driven rollers.
- Voltage: DC24V , with power switch in Box.
- Optional: AC240V with 3 pins plug.

Note:

- 1.There is an emergency stop button and power switch on the surface of the electric box.
(Forward& Reverse Buttons are optional)
- 2.The internal knob controller (BA201) is used to adjust the speed.
- 3.With covers for Belts.
- 4.Colour : COLOUR GRAY RAL 7035
- 5.The top of the roller is below the frame, to be confirmed.