


HIGH PERFORMANCE SERIES CASTORS

These heavy-duty castors are designed with endurance and performance in mind.

They feature large opposed taper roller bearings in the swivel head, which allow for the castors to be power-towed at speeds of up to 12kph. The frames are robot welded and fully sealed to ensure a long lifespan. They are designed and custom manufactured in-house.

- Polyurethane cast-iron, cast iron, pneumatic, or solid-pneumatic wheels available
- Power-towing up to 12kph

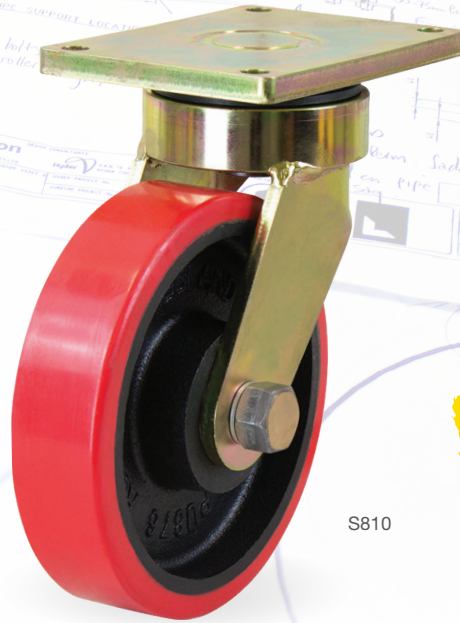

UP TO
1500KG
CAPACITY

CUSTOM
DESIGN



S810



S818




S1043

| Diameter (mm) | Width (mm) | Wheel Type | Wheel Code | Bearing Type | Load Capacity (kg) | Height (mm) | Swivel Radius (mm) | Rigid Code | Swivel Code | |
|---------------|------------|-----------------|------------|--------------|--------------------|-------------|--------------------|------------|-------------|---|
| 150 | 50 | Poly Ci | PU659 | Ball | 900 | 214 | 135 | R634 | S633 | 👤 |
| 150 | 75 | Poly Ci | PU615 | Ball | 1100 | 214 | 135 | R656 | S657 | |
| 150 | 45 | Cast Iron | Ci601 | Ball | 1500 | 214 | 135 | R632 | S631 | |
| 150 | 75 | Cast Iron | Ci689 | Ball | 1500 | 214 | 135 | R691 | S690 | |
| 200 | 50 | Poly Ci | PU876 | Ball | 1200 | 264 | 172 | R811 | S810 | 👤 |
| 200 | 50 x 2 | TW Poly Ci | PU876 | Ball | 1200 | 264 | 172 | R873 | S872 | 👤 |
| 200 | 75 | Poly Ci | PU896 | Ball | 1300 | 264 | 172 | R898 | S897 | 👤 |
| 200 | 50 | SG Iron | SG835 | Ball | 1500 | 264 | 172 | R819 | S818 | |
| 200 | 75 | SG Iron | SG834 | Ball | 1500 | 264 | 172 | R838 | S837 | |
| 250 | 75 | Poly Ci | PU1076 | Ball | 1300 | 312 | 210 | R1018 | S1017 | 👤 |
| 250 | 75 x 2 | TW Poly Ci | PU1076 | Ball | 1300 | 312 | 210 | R1091 | S1090 | 👤 |
| 250 | 75 | SG Iron | SG1040 | Ball | 1500 | 312 | 210 | R1042 | S1043 | |
| 300 | 75 | Poly Ci | PU1217 | Ball | 1500 | 375 | 240 | R1229 | S1228 | 👤 |
| 300 | 100 | Poly Ci | PU1224 | Ball | 1500 | 375 | 240 | R1226 | S1225 | 👤 |
| 400 | 100 | Pneumatic | PN1616 | Ball | 300 | 475 | 295 | R1602 | S1601 | 👤 |
| 400 | 100 | Solid Pneumatic | SN1612 | Ball | 950 | 475 | 295 | R1649 | S1650 | 👤 |


Brake Options

B = Brake
D = 4 Way Directional Lock

To order castors with Brake or 4 Way Directional Lock add B or D to end of swivel code e.g. S633B



Standard High Performance Series baseplate



Standard twin wheel rigid baseplate

👤 indicates towable castors